

Machine Model:	EMMEGI SCA E/650	Origin:	ITALY
Description:	SINGLE HEAD CUTTING OFF MACHINE		



Single-head, rising blade cutting-off machine, with N/C automatic rotation of the vertical axis through brushless motor and contemporaneous hydraulic tilting of the horizontal axis. Cutting with angular settings from 90° to 22°30' (left and right) on the vertical axis and from 90° to 35° (right only) on the horizontal axis.



Blade

The cutting-off machine is equipped with a 650-mm-diameter Widia blade mounted on a hydraulic feed system, which ensures the rigidity of the system and, at the same time, the power needed to process profiles with large sections.



Vices

The workpiece is clamped using horizontal and vertical vices, which are characterised by extremely fast positioning. The robustness of the mechanical structure used ensures the extreme rigidity of workpiece clamping on the work benches.



Cutting zone

To enable maximum utilization of the large cutting capacity, which ensures the machinability of large profiles, the cutting zone features a sturdy structure designed to ensure maximum stiffness. This is with regard to both the horizontal plane and the vertical square.



Control

The control console features a 7" touch-screen display and fully personalised software, allowing complete management of the machine operating functions. It allows reading the cutting unit tilting on the horizontal axis, setting the cutting angles on the NC vertical axis, as well as workpiece clamping. Using the control console, it is also possible to prepare and optionally import angle cutting lists automatically.



Additional horizontal pneumatic vice (Optional)

It is possible to install additional vices beyond the standard machine equipment. In this way, it is possible to ensure perfect clamping of bars or bar sections even in the case of special profiles.



Vice pressure reducers with pressure gauge (Optional)

When cutting profiles of particular consistency, flexibility or brittleness, the vices can be equipped with pressure regulators. This solution, combined with an accurate use of the vices, allows adjusting the profile clamping even in very complex cases.


MACHINE CHARACTERISTICS

Electronic control of the vertical rotation axis	●
Hydraulic blade feed	●
Blade rotation on vertical axis	$-22^{\circ}30' \div +22^{\circ}30'$
Electronic adjustment of intermediate angles on vertical axis	●
Blade tilting on horizontal axis (to the right)	$90^{\circ} \div 35^{\circ}$
Blade diameter (mm)	$\varnothing 650$
Absolute encoder positioning	●
Widia blade	●
Mechanic adjustment of intermediate angles on horizontal axis	●
Horizontal axis tilting digital display	●
Adjustable blade feed speed	●


BLADE MOTOR

Three-phase brake motor with inverter	●
Power rating (kW), three-phase drive motor	5,5
Blade rotation speed (rpm)	2.800
Peripheral speed (m/s)	95
Brake intervention time (s)	10

CUTTING DIAGRAM

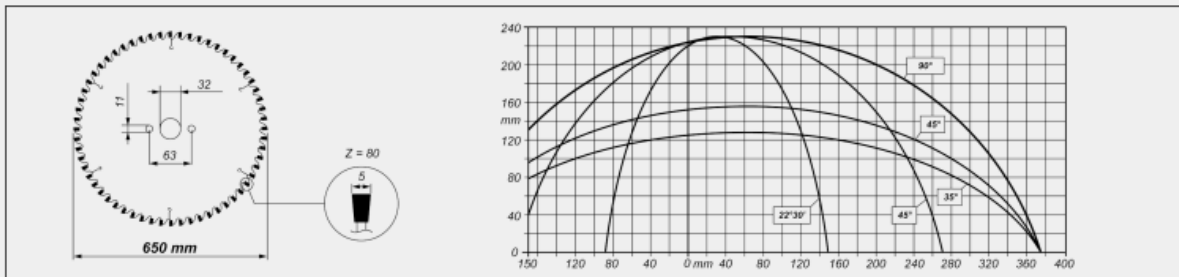

CUTTING UNIT TILTING

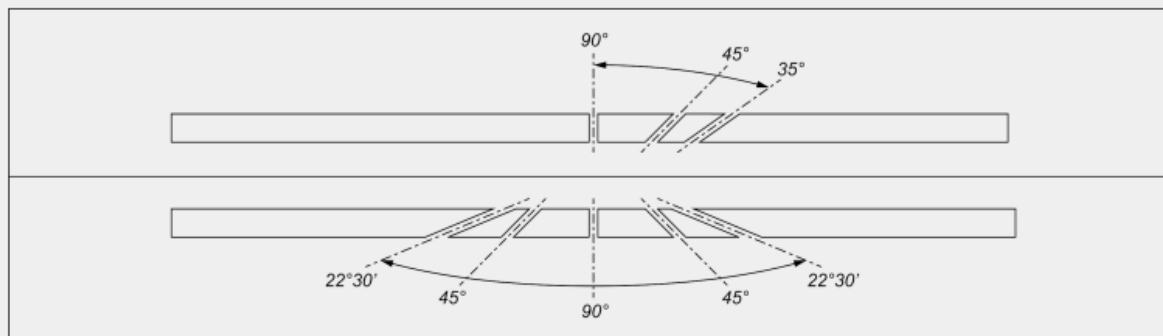

Electronic adjustment of intermediate angles on vertical axis
 Mechanic adjustment of intermediate angles on horizontal axis



SAFETY DEVICES AND PROTECTIONS

Side protection tunnels	●
Manual operated full guard	●

LUBRICATION AND SUCTION

Minimal oil diffusion lubrication system	●
Pre-setting for automatic exhauster start	●

PROFILE POSITIONING AND CLAMPING

Adjustable and retractable profile support square for compound cuts up to 35°	●
Loading surface height (mm)	1.100
Pressure reducers with pressure gauge for clamps	○
Additional horizontal vice	○
Horizontal pneumatic vice	1
Vertical pneumatic vices	3

Included ● Available ○